

LPMPH60 Straight Connector

Overview:

Application

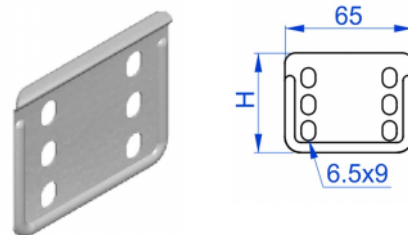
Connecting cable routes.

Material



Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

Use 4 Screw Sets SGK M6×10 or SG M6×10 to install

Connected products:

							
LUPJ...H60 90° Vertical Bend	OPZP...H60 Horizontal Bypass	OPZBJ...H60 Horizontal Bypass	OPZBP...H60 Horizontal Bypass	OPNJ...H60 Vertical Bypass	OPNP...H60 Vertical Bypass	OPNBj...H60 Vertical Bypass	OPNBP...H60 Vertical Bypass
							
TRSJ...H60 Vertical Crosswise Tee	TRSP...H60 Vertical Tee - Crosswise	TRSBj...H60 Vertical Tee - Crosswise	OPZJ...H60 Horizontal Bypass	LUMPP...H60 45° Vertical Bend	LUP...H60 90° Vertical Bend	LUBj...H60 90° Vertical Bend	LUBP...H60 90° Vertical Bend
							
LUPJ...H60 90° Vertical Bend	LUPP...H60 90° Vertical Bend	LUMJ...H60 45° Vertical Bend	LUMP...H60 45° Vertical Bend	LUMBj...H60 45° Vertical Bend	LUMBP...H60 45° Vertical Bend	LUMPJ...H60 45° Vertical Bend	TRSBP...H60 Vertical Tee - Crosswise