

## WFMCS... Bracket

### Overview:

#### Application

Suspending/fastening wire mesh cable trays.

#### Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

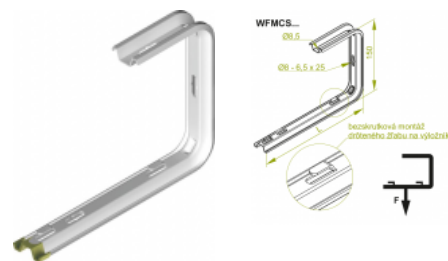

Each of bracket is supplied with a Protective Cap

For assembly, use of PD11 spacers is suggested.

**Important!**

Bracket WFMCS may be used in combination with Clamping

Piece ZS/ZSO to substitute other system components

### Versions:

| Symbol   | Length L [m] | Catalogue number | Quantity in box | Height H [mm] | Weight 1 pc. | Maximum load Fmax[kN] |
|----------|--------------|------------------|-----------------|---------------|--------------|-----------------------|
| WFMCS100 | 138          | 901810           | 20              | 170           | 0,24         | 0,35                  |
| WFMCS150 | 163          | 901815           | 20              | 170           | 0,26         | 0,30                  |
| WFMCS200 | 238          | 901820           | 20              | 170           | 0,33         | 0,25                  |
| WFMCS300 | 338          | 901830           | 20              | 170           | 0,42         | 0,20                  |
| WFMCS400 | 438          | 901840           | 20              | 170           | 0,52         | 0,15                  |