

LKMP...H50 Straight Connector

Overview:

APPLICATIONS

Connecting cable routes.

MATERIAL


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Available finishes:

F- steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304)

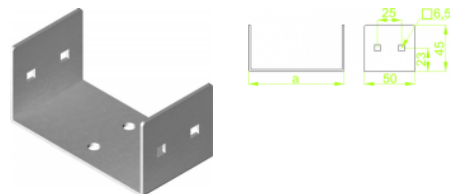

Use Screw Sets SGKM6×14 to install

Sheet thickness: **1,5 mm**

Versions:

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LKMP50H50	45	810405	2	0,11
LKMP100H50	95	810410	2	0,21