

LKMC...H200 Straight Connector

Overview:

APPLICATIONS

Connecting cable routes.

MATERIAL


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Available finishes:

F- steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304)

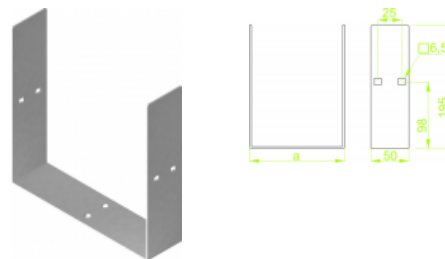

Use Screw Sets SGKM6×14 to install

Sheet thickness: **2,0 mm**

Versions:

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LKMC200H200	195	816920	2	0,93
LKMC300H200	295	816930	2	1,06
LKMC400H200	395	816940	2	1,22
LKMC500H200	495	816950	2	1,40
LKMC600H200	595	816960	2	1,51