


PKWL... Reinforced cover

Overview:

APPLICATION
 Cable protection against damage.
 Used in heavy dust indoor conditions.

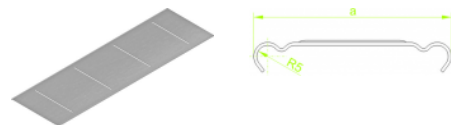

MATERIAL
 Steel, strip-galv. acc. to the Sendzimir
 to method PN-EN 10346:2011 (SG)
 Available finishes:
 F- steel, hot-dip galv to
 PN-EN ISO 1461:2011 (HDG)
 for 1mm thick min
 E - stainless steel (SS), grade 1.4301 (AISI304)
 for 1mm thick min
 L- powder coating in a full range of colours (PC)

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PKWL300/2	2000	300	108230	4	1,92
PKWL300/3	3000	300	108331	4	1,92
PKWL400/2	2000	400	108241	4	2,52
PKWL400/3	3000	400	108341	4	2,52
PKWL500/2	2000	500	108250	2	3,12
PKWL500/3	3000	500	108350	2	3,12
PKWL600/2	2000	600	108260	2	3,72
PKWL600/3	3000	600	108360	2	3,72