

LLBP...H80 Adjustable Vertical Bend

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

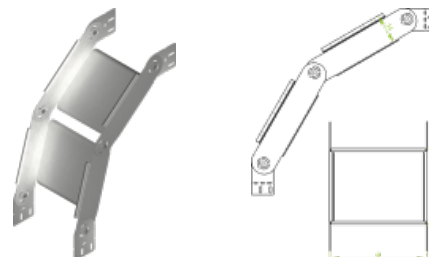

For installation use Screw Sets SGK M6×12 or SG M6×12.

Adjustable Vertical Bend is delivered fully assembled together with:

2 Adjustable Vertical Bend Elements

4 pairs of Angle Connectors


6 sets of screws

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLBP100H80	100	187410	10	2,48
LLBP150H80	150	187415	10	2,73
LLBP200H80	200	187420	4	2,98
LLBP300H80	300	187430	4	3,48
LLBP400H80	400	187440	2	3,95
LLBP500H80	500	187450	2	4,45
LLBP600H80	600	187460	2	4,97

Connected products:

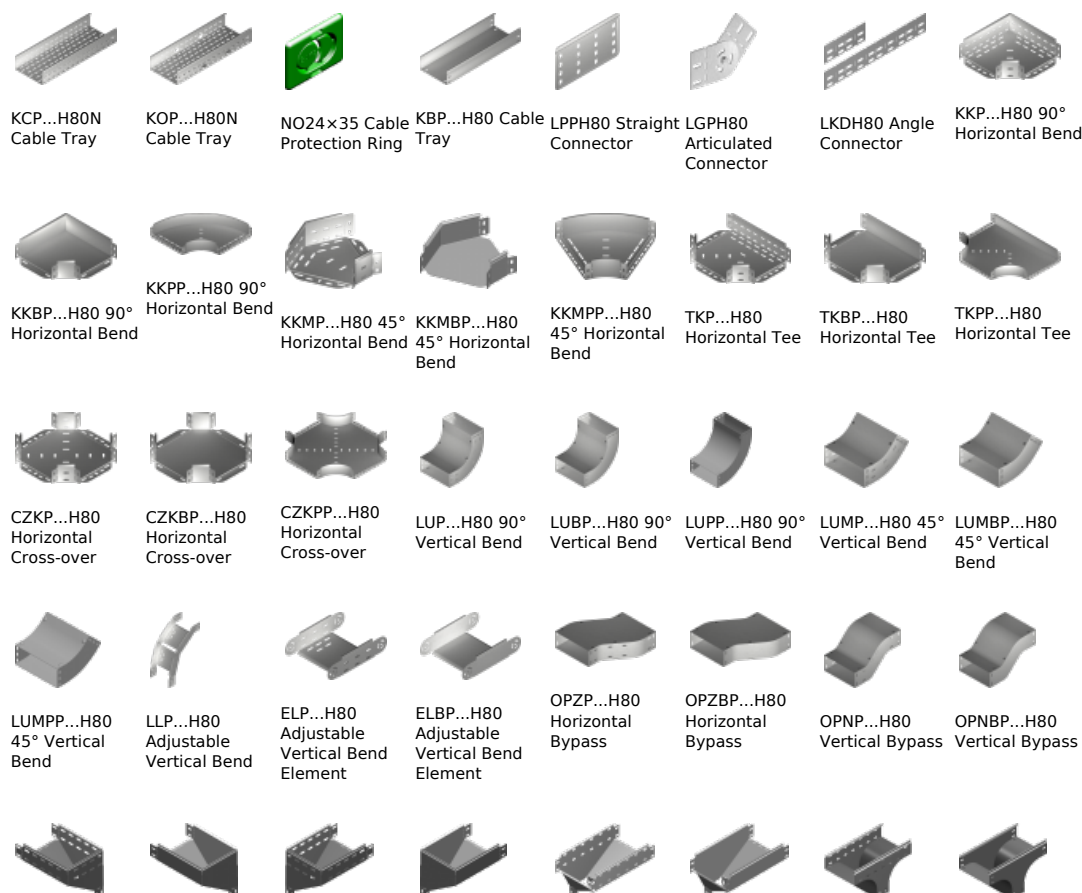

KRPP...H80 Vertical Elbow - Right	KRPBP...H80 Vertical Elbow - Right	KRLP...H80 Vertical Elbow - Left	KRLBP...H80 Vertical Elbow - Left	TRP...H80 Vertical Tee -Lengthwise	TRBP...H80 Vertical Tee -Lengthwise	TRSP...H80 Vertical Tee - Crosswise	TRSBP...H80 Vertical Tee - Crosswise
							
RKLP...H80 Left Reducer	RKLPBP...H80 Left Reducer	RKLP...H80 Right Reducer	RKLPBP...H80 Right Reducer	RKSP...H80 Straight Reducer	RKSBP...H80 Straight Reducer	TKDP...H80 Add-on Tee	LRPPH80 Corner Connector