


KCL/KCOL...H60 Cable Tray

Overview:

APPLICATION
 Cable routing

MATERIAL
 Steel, strip-galv. acc. to the
 Sendzimir method PN-EN 10346:2011
 Available finishes:
 L- powder coating in a full range of colours (PC)

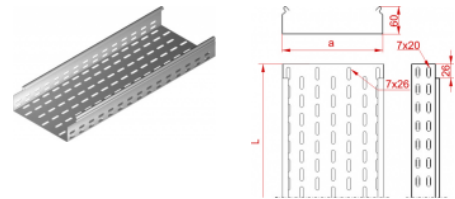

Connecting cable trays by sliding-in and screwing together

Max. safe load: 20 kg/m
Max. spacing of supports: 1.5m

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KCL/KCOL100H60/3	3000	100	160810	6	1,18
KCL/KCOL150H60/3	3000	150	160815	6	1,43
KCL/KCOL200H60/3	3000	200	160820	6	1,68
KCL/KCOL300H60/3	3000	300	160830	4	2,18