

## KCP/KCOP...H60E Cable Tray

### Overview:


**APPLICATION**  
 Cable routing

**MATERIAL**  
 Stainless steel, grade 1.4301 (AISI304)  
 Available finishes:  
 L- powder coating in a full range of colours (PC)

**Connecting cable trays only with connectors**

**Max. safe load: 20 kg/m**  
**Max. spacing of supports: 1.5m**

Sheet thickness: **1,5 mm**

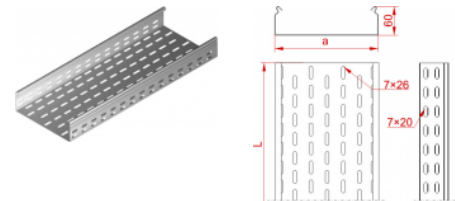

### Versions:

| Symbol            | Length L [m] | Width a [mm] | Catalogue number | Quantity in box | Weight [1m] |
|-------------------|--------------|--------------|------------------|-----------------|-------------|
| KCP/KCOP100H60/3E | 3000         | 100          | 861010           | 6               | 2,07        |
| KCP/KCOP150H60/3E | 3000         | 150          | 861015           | 6               | 2,49        |
| KCP/KCOP200H60/3E | 3000         | 200          | 861020           | 4               | 2,90        |
| KCP/KCOP300H60/3E | 3000         | 300          | 861030           | 4               | 3,33        |
| KCP/KCOP400H60/3E | 3000         | 400          | 861040           | 2               | 3,73        |
| KCP/KCOP500H60/3E | 3000         | 500          | 861050           | 2               | 6,48        |
| KCP/KCOP600H60/3E | 3000         | 600          | 861060           | 2               | 7,47        |