

CZKBJ...H60 Horizontal Cross-over


Overview:

APPLICATION
Branching out cable runs

MATERIAL
Steel, strip-galv. acc. to the
Sendzimir method PN-EN 10346:2011
Available finishes:
F - steel, hot-dip galvanised
to PN-EN ISO 1461:2011 (HDG)
E - stainless steel, grade 1.4301 (AISI304)
L - powder coating in a full range of colours (PC)

For the assembly use:
 - Width 100÷200 - min. 20 sets of Screw
 - Width 300÷400 - min. 24 sets of Screw
 - Width 500÷600 - min. 28 sets of Screw SGKM6x12

Sheet thickness: 1,0 mm

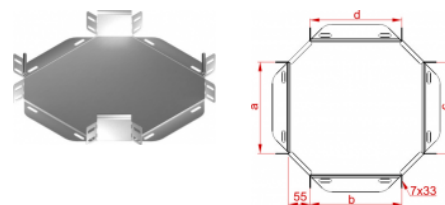

Versions:

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
CZKBJ100H60	100	160903	20	0,48
CZKBJ150H60	150	161003	10	0,67
CZKBJ200H60	200	161103	10	0,96
CZKBJ300H60	300	161303	10	1,49
CZKBJ400H60	400	161403	2	2,28