

LLBJ...H60 Adjustable Vertical Bend


Overview:

APPLICATION

Diversions in cable routing.
Full-range angle adjustment with a lock.

MATERIAL

Steel, strip-galv. acc. to the
Sendzimir method PN-EN 10346:2011
Available finishes:
F - steel, hot-dip galvanised
to PN-EN ISO 1461:2011 (HDG)
E - stainless steel, grade 1.4301 (AISI304)
L - powder coating in a full range of colours (PC)

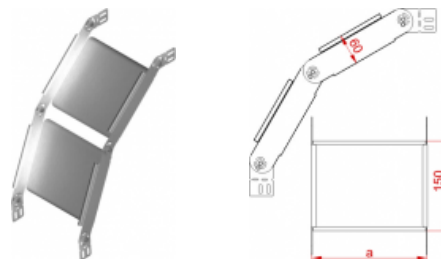

For the assembly use min. 8 sets of Screw SGKM6x12

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLBJ100H60	100	162501	2	1,32
LLBJ150H60	150	162601	2	1,50
LLBJ200H60	200	162701	2	1,60
LLBJ300H60	300	162901	2	1,98
LLBJ400H60	400	163001	2	2,32