


PKJ... Cover

Overview:

APPLICATION

Eliminating the risk of mechanical damage to cables. Improving overall aesthetic appearance of cable runs

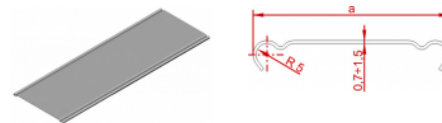

MATERIAL

Steel, strip-galv. acc. to the
Sendzimir method PN-EN 10346:2011
Available finishes:
F- steel, hot-dip galvanised
to PN-EN ISO 1461:2011 (HDG)
up to 1.0mm thickness
E- stainless steel, grade 1.4301 (AISI304)
up to 1.2mm thickness
L- powder coating in a full range of colours (PC)

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PKJ100/3	3000	100	100810	10	1,04
PKJ150/3	3000	150	100815	6	1,44
PKJ200/3	3000	200	100820	6	1,84
PKJ300/3	3000	300	100830	4	2,64
PKJ400/3	3000	400	100640	4	3,44