

PKD... Cover


Overview:

APPLICATION

Eliminating the risk of mechanical damage to cables. Improving overall aesthetic appearance of cable runs

MATERIAL

Steel, strip-galv. acc. to the Sendzimir method PN-EN 10346:2011
 Available finishes:
 F- steel, hot-dip galvanised to PN-EN ISO 1461:2011 (HDG) up to 1.0mm thickness
 E- stainless steel, grade 1.4301 (AISI304) up to 1.2mm thickness
 L- powder coating in a full range of colours (PC)

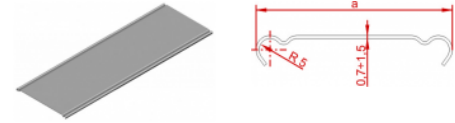

Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PKD100/3	3000	100	101010	6	1,30
PKD150/3	3000	150	101015	6	1,80
PKD200/3	3000	200	101020	4	2,30
PKD300/3	3000	300	101030	4	3,30
PKD400/3	3000	400	100840	4	4,30