

RDSP...H60N Straight Reducer


Overview:

APPLICATION

Connecting cable routes at different angles

MATERIAL

Steel, strip-galv. acc. to the
 Sendzimir method PN-EN 10346:2011
 Available finishes:
 F - steel, hot-dip galvanised
 to PN-EN ISO 1461:2011 (HDG)
 E - stainless steel, grade 1.4301 (AISI304)
 L - powder coating in a full range of colours (PC)

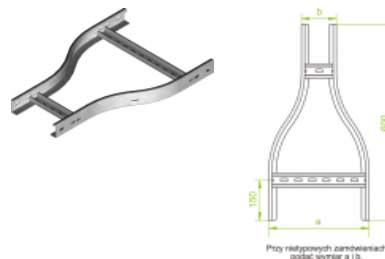

**For assembly use 4 pcs of Straight connectors
 LDC/LDOCH60
 and 16 sets of screw SGKM8x14**

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Size b [mm]
RDSP200/100H60	200	467820	2	1,56	100
RDSP300/200H60	300	467830	2	1,73	200
RDSP400/300H60	400	467840	2	1,91	300
RDSP500/400H60	500	467850	2	2,09	400
RDSP600/500H60	600	467860	2	2,25	500