

LPDZP/LPDZOP...H60 90° Vertical Bend - External


Overview:

APPLICATION

Diversion in cable routing.

MATERIAL

Steel, strip-galv. acc. to the
 Sendzimir method PN-EN 10346:2011
 Available finishes:
 F - steel, hot-dip galvanised
 to PN-EN ISO 1461:2011 (HDG)
 E - stainless steel, grade 1.4301 (AISI304)
 L - powder coating in a full range of colours (PC)

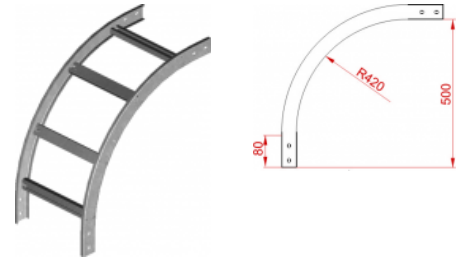

**For assembly use 4 pcs of Straight connectors
 LDC/LDOCH60
 and 16 sets of screw SGK8x14**

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDZP/LPDZOP100H60	100	469010	1	1,90
LPDZP/LPDZOP200H60	200	469020	1	2,26
LPDZP/LPDZOP300H60	300	469030	1	2,66
LPDZP/LPDZOP400H60	400	469040	1	3,02
LPDZP/LPDZOP500H60	500	469050	1	3,42
LPDZP/LPDZOP600H60	600	469060	1	3,82