

PDDP... Cover

Overview:

APPLICATION


Eliminating the risk of mechanical damage to cables. Improving overall aesthetic appearance of cable runs

MATERIAL

Steel, strip-galv. acc. to the Sendzimir method PN-EN 10346:2011
Available finishes:
F- steel, hot-dip galvanised to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

Sheet thickness: **1,5 mm**

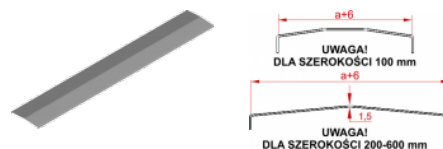

Versions:

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
PDDP100/3	3000	100	402510	10	1,48
PDDP200/3	3000	200	402520	6	2,71
PDDP300/3	3000	300	402530	6	3,95
PDDP400/3	3000	400	402540	4	5,19
PDDP500/3	3000	500	402550	4	6,42
PDDP600/3	3000	600	402560	4	7,66