


KDS/KDSO...H60F Wire Mesh Cable Tray

Overview:

APPLICATION
 Cable routing.

MATERIAL
 Hot dip galvanised wire
 to PN-EN ISO 1461:2011 (HDG)
 Available finishes:
 L - powder coating in a full range of colours (PC)

Max. safe load
KDS/KDSO60H60/3: 2 kg/m
KDS/KDSO100 - 600H60/3: 20 kg/m
Max. spacing of supports: 1.5m

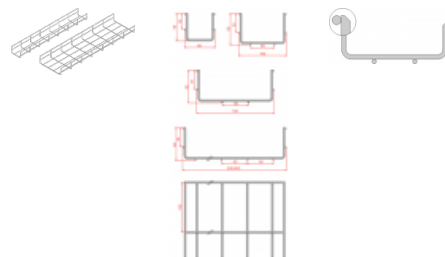

Versions:

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box
KDS/KDSO60H60/3F	3000	60	970506	8
KDS/KDSO100H60/3F	3000	100	970510	8
KDS/KDSO150H60/3F	3000	150	970515	8
KDS/KDSO200H60/3F	3000	200	970520	8
KDS/KDSO300H60/3F	3000	300	970530	4
KDS/KDSO400H60/3F	3000	400	970540	2
KDS/KDSO500H60/3F	3000	500	970550	2
KDS/KDSO600H60/3F	3000	600	970560	2