

LKJ/LKOJH60 Angle Connector

Overview:

APPLICATIONS

Connecting cable routes.

MATERIAL

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).


Available finishes:

F - steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304),

L - powder painting in standard RAL color

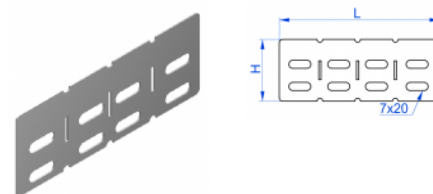

Optional bending or break-off of any required length.

For the assembly use 4 sets of Screw Sets SGKM6x10 or SGM6x10

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
LKJ/LKOJH60	140	162500	100	50	0,03
LKJH60/1	1000	162600	10	50	0,22