

ODLJH60 Add-on Tee

Overview:

APPLICATIONS

APPLICATIONS

Branching out cable routes.

MATERIAL


Steel, strip-galv. acc. to the Sendzimir method
to PN-EN 10346:2011 (SG).

Available finishes:

F - steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304),

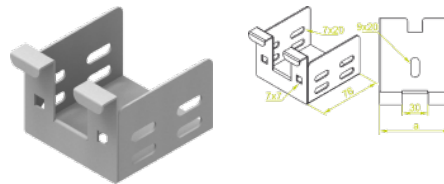

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ODLJ75H60	75	161207	20	0,16
ODLJ120H60	120	161212	20	0,25