

WFL/WFLO Bracket

Overview:

APPLICATIONS

Supporting cable trays.

MATERIAL:

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).


Available finishes:

F - steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304)

L - powder painting in standard RAL color

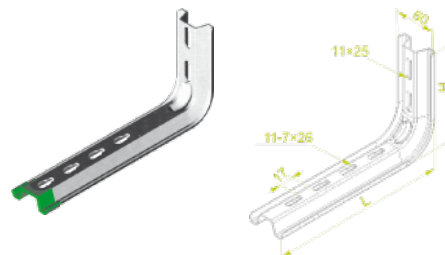

**In installation the application of
Spacer PD11**

**IMPORTANT! Non-standard lengths of brackets
available to special order**

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WFL/WFLO100	170	720110	30	120	0,30	1,40
WFL/WFLO150	205	720115	30	130	0,37	1,10
WFL/WFLO200	255	720120	30	130	0,43	0,90