


WFL/WFLO Bracket

Overview:

APPLICATIONS
Supporting cable trays.

MATERIAL:
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).
Available finishes:
F - steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E - stainless steel (SS), grade 1.4301 (AISI304)
L - powder painting in standard RAL color

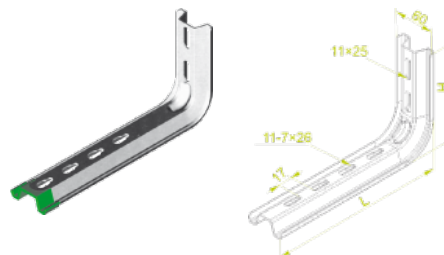

In installation the application of Spacer PD11

IMPORTANT! Non-standard lengths of brackets available to special order

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WFL/WFLO100	170	720110	30	120	0,30	1,40
WFL/WFLO150	205	720115	30	130	0,37	1,10
WFL/WFLO200	255	720120	30	130	0,43	0,90