


CWP40H40...MC C-uholník zosilnený

Overview:

POUŽITIE
Vytvorenie podpornej konštrukcie pre fotovoltaické panely.

MATERIÁL
Oceľ S350GD s povlakom Magnelis®

Na objednávku:
F - oceľ S355 žiarovo zinkovaná ponorom EN ISO 1461:2011

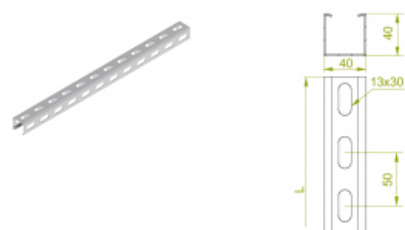

Versions:

Sheet thickness: **1,5 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Height H [mm]	Weight 1 pc.	Obsah balenia
CWP40H40/3MC	3000	40	859330	40	4,67	10 ks
CWP40H40/3,5MC	3500	40	859338	40	5,46	10 ks
CWP40H40/3,7MC	3700	40	859337	40	5,86	8 ks