

KBJ...H30 Cable Tray

Overview:

Application
Cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)




Important! Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. To install cable tray use Screw Sets SGK M6x10 or SG M6x10.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KBJ35H30/3	3000	35	131203	20	0,92	850
KBJ50H30/3	3000	50	131205	20	1,04	1300
KBJ100H30/3	3000	100	131210	12	1,44	2800
KBJ150H30/3	3000	150	131215	8	1,84	4300
KBJ200H30/3	3000	200	131220	6	2,24	5800
KBJ300H30/3	3000	300	131230	6	3,04	8800

Connected products:

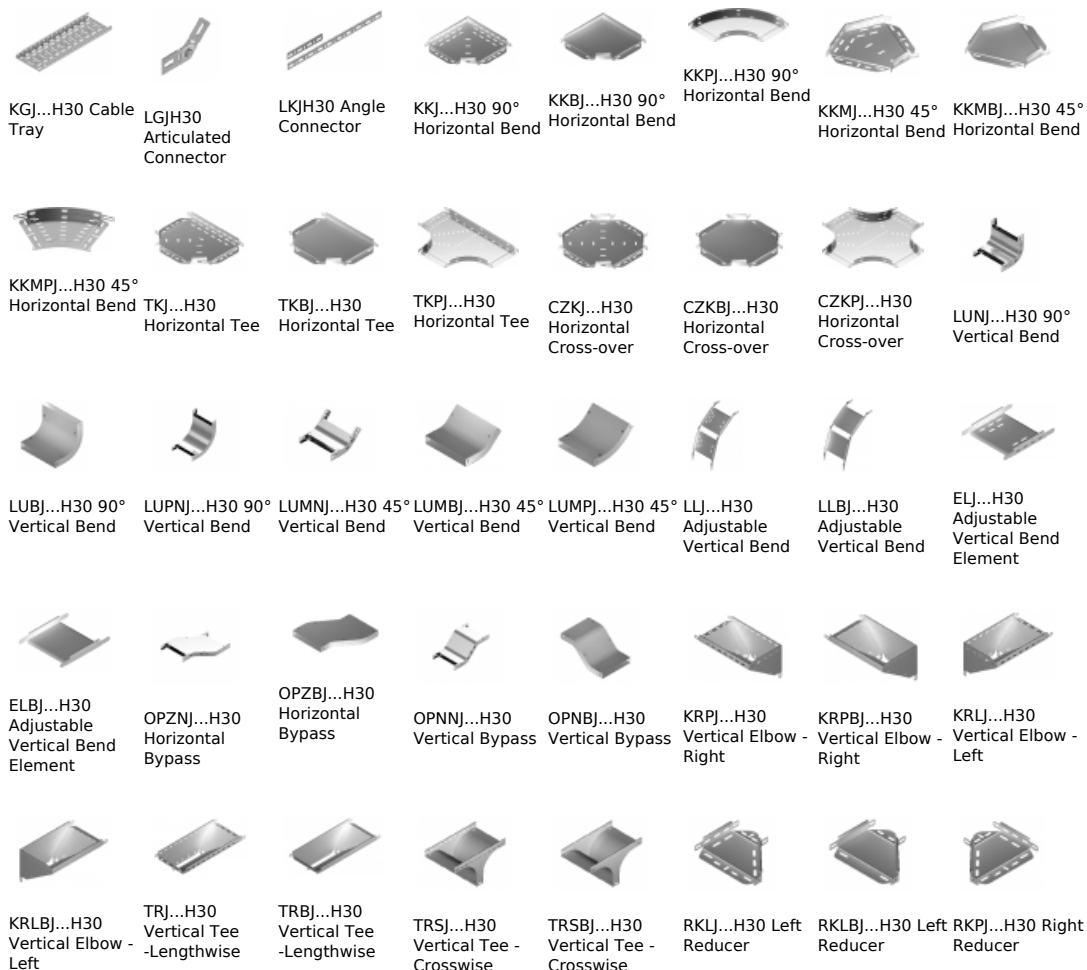



RKPBJ...H30
Right Reducer



RKSJ...H30
Straight Reducer



RKSBJ...H30
Straight Reducer



LRJH30 Corner
Connector



LRBJH30 Corner
Connector



TKDJ...H30
Add-on Tee



LRPJH30 Corner
Connector