

PKL... Cover

Overview:

Application

Cable protection against damage.
Used in heavy dust indoor conditions.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG) for 1mm thick min

E- stainless steel (SS) to 1.2mm thick max.

L- powder coating in a full range of colours (PC)

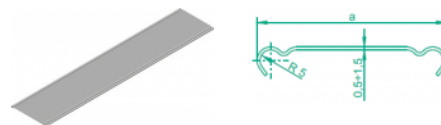

Important! Made to order covers are 2m long. Covers PKP and PZKP are not manufactured from stainless steel (SS).

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PKL35/2	2000	35	100503	20	0,29
PKL50/2	2000	50	100505	20	0,42
PKL50/3	3000	50	100605	20	0,42
PKL100/2	2000	100	100510	10	0,72
PKL100/3	3000	100	100610	10	0,72
PKL150/2	2000	150	100515	6	1,02
PKL150/3	3000	150	100615	6	1,02
PKL200/2	2000	200	100520	6	1,32
PKL200/3	3000	200	100620	6	1,32
PKL300/2	2000	300	100530	4	1,92
PKL300/3	3000	300	100630	4	1,92
PKL400/2	2000	400	100340	4	2,52
PKL400/3	3000	400	100440	4	2,52
PKL500/2	2000	500	100350	2	3,12
PKL500/3	3000	500	100450	2	3,12
PKL600/2	2000	600	100360	2	3,72
PKL600/3	3000	600	100460	2	3,72

Connected products:

