

## PKKMP... Cover For 45° Horizontal Bend

### Overview:

#### Application

Protecting cables against damage. Used in heavy dust indoor conditions.

#### Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

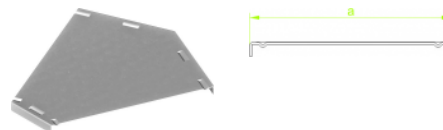

**NOTE: To attach covers without locks to non-perforated fittings use Clamp ZPD. With perforated fittings Clamp ZPNH... should be applied**  
**IMPORTANT! Covers with locks for fittings available to order**

### Versions:

Sheet thickness: **1,5 mm**

| Symbol          | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-----------------|--------------|------------------|-----------------|--------------|
| <b>PKKMP50</b>  | <b>50</b>    | <b>102805</b>    | <b>20</b>       | <b>0,09</b>  |
| <b>PKKMP100</b> | <b>100</b>   | <b>102810</b>    | <b>20</b>       | <b>0,17</b>  |
| <b>PKKMP150</b> | <b>150</b>   | <b>102815</b>    | <b>20</b>       | <b>0,30</b>  |
| <b>PKKMP200</b> | <b>200</b>   | <b>102820</b>    | <b>20</b>       | <b>0,48</b>  |
| <b>PKKMP300</b> | <b>300</b>   | <b>102830</b>    | <b>10</b>       | <b>0,98</b>  |
| <b>PKKMP400</b> | <b>400</b>   | <b>102840</b>    | <b>10</b>       | <b>1,61</b>  |
| <b>PKKMP500</b> | <b>500</b>   | <b>102850</b>    | <b>10</b>       | <b>2,40</b>  |
| <b>PKKMP600</b> | <b>600</b>   | <b>102860</b>    | <b>10</b>       | <b>3,33</b>  |

### Connected products:

