

PKD... Cover

Overview:

Application

Protecting cables against damage. Used in heavy dust indoor conditions

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG) for 1mm thick min

E- stainless steel (SS) to 1.2mm thick max.

L- powder coating in a full range of colours (PC)

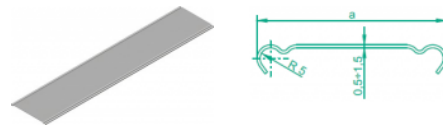

Important! Made to order covers are 2m long. Covers PKP and PZKP are not manufactured from stainless steel (SS).

Versions:

Sheet thickness: **1,2 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PKD50/3	3000	50	101005	10	0,80
PKD100/3	3000	100	101010	6	1,30
PKD150/3	3000	150	101015	6	1,80
PKD200/3	3000	200	101020	4	2,30
PKD300/3	3000	300	101030	4	3,30
PKD400/3	3000	400	100840	4	4,30
PKD500/3	3000	500	100850	2	5,30
PKD600/3	3000	600	100860	2	6,30

Connected products:

