

KGL...H30 Cable Tray

Overview:

Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
L- powder coating in a full range of colours (PC)




Important! Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. To install cable tray use Screw Sets SGK M6x10 or SG M6x10.

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KGL35H30/3	3000	35	130403	12	0,53	850
KGL50H30/3	3000	50	130405	12	0,61	1300
KGL100H30/3	3000	100	130116	12	0,84	2800
KGL150H30/3	3000	150	130216	12	1,06	4300
KGL200H30/3	3000	200	130316	12	1,39	5800
KGL300H30/3	3000	300	130416	12	1,89	8800

Connected products:

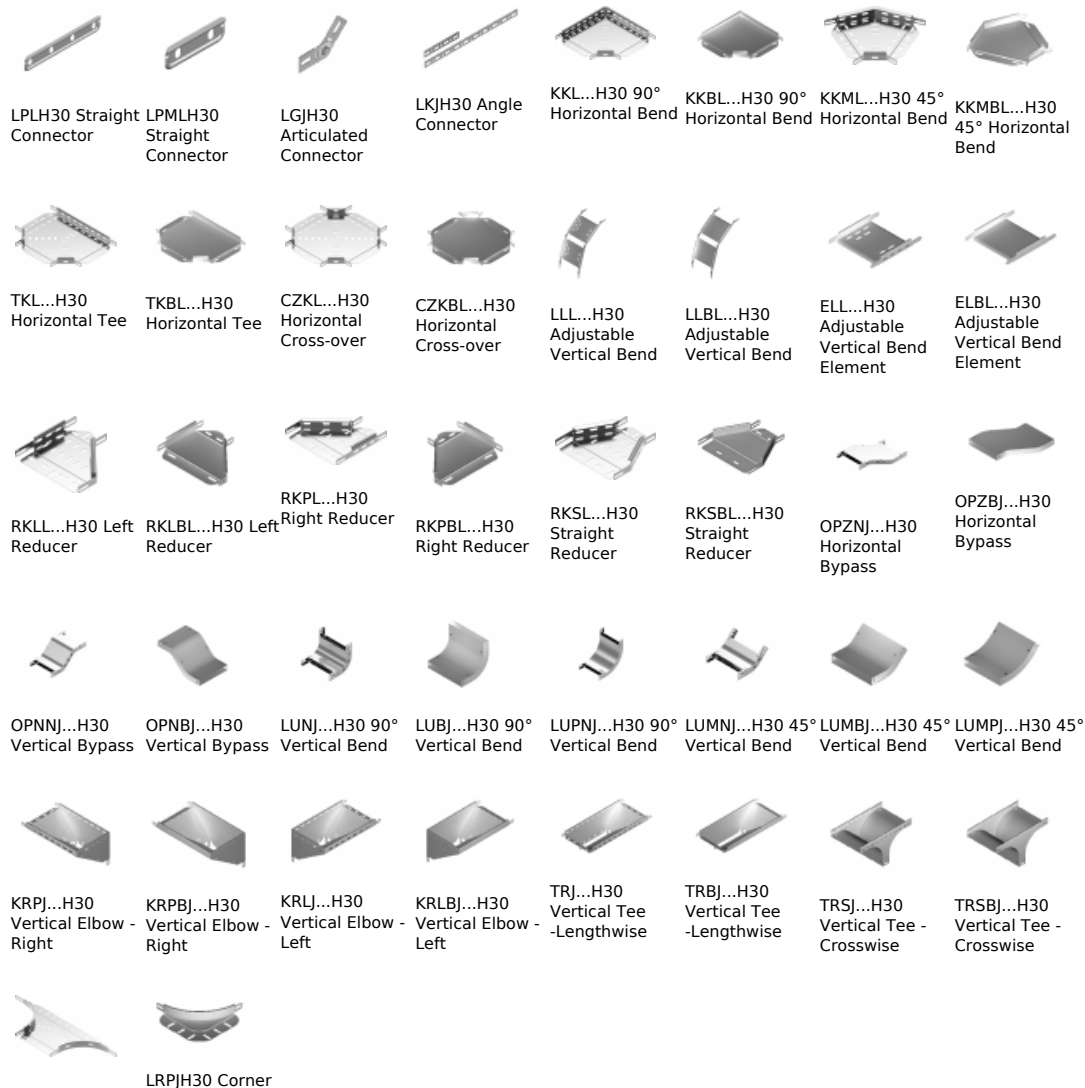

TKDJ...H30 Connector
Add-on Tee