

LZWMP...H50 45° Vertical Bend - Internal

Overview:

APPLICATION

Diversion in cable routing

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray lengths use Straight Connectors LZC...

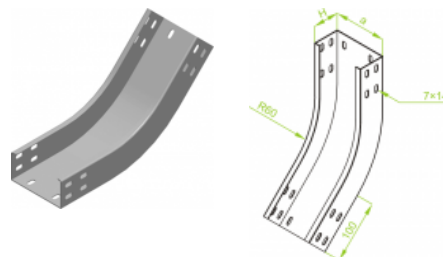

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZWMP50H50	50	352005	10	0,73
LZWMP100H50	100	352010	10	0,85
LZWMP200H50	200	352020	6	1,19
LZWMP300H50	300	352030	4	1,54
LZWMP400H50	400	352040	2	1,89
LZWMP500H50	500	352050	1	2,25
LZWMP600H50	600	352060	1	2,60

Connected products:

