

LZZC...H100 90° Vertical Bend - External

Overview:

APPLICATION

Diversion in cable routing

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray lengths use Straight Connectors LZC...

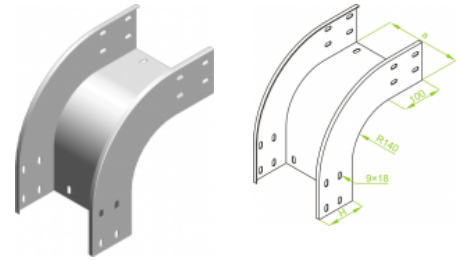

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZZC100H100	100	311510	6	2,26
LZZC200H100	200	311520	6	3,01
LZZC300H100	300	311530	4	3,61
LZZC400H100	400	311540	4	4,28
LZZC500H100	500	311550	2	4,96
LZZC600H100	600	311560	2	5,62

Connected products:



KZWC...H100
Reinforced
Cable Tray



KZLC...H100
Cable Tray with
Integral
Connector



LZCH100
Straight
Connector



LZGCH100
Articulated
Connector



LCC...H100
U-Shaped
Connector



KKZC...H100 90°
Horizontal Bend



KKZMC...H100
45° Horizontal
Bend



TKZC...H100
Horizontal Tee



CZKZC...H100
Horizontal
Cross-over



LZZMC...H100
45° Vertical
Bend - External



LZWC...H100
90° Vertical
Bend - Internal



LZWMC...H100
45° Vertical
Bend - Internal



TRZC...H100
Vertical Tee -
Lengthwise



RKZC...H100
Straight
Reducer