

LCC...H200 U-Shaped Connector

Overview:

APPLICATION

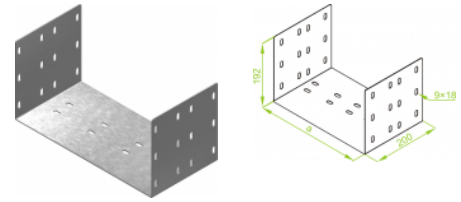
Connecting elements of cable runs

Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:
E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For the installation use 28 sets of Screw SGF M8×14



Versions:

 Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LCC200H200	195	370520	6	1,85
LCC300H200	295	370530	6	2,12
LCC400H200	395	370540	2	2,43
LCC500H200	495	370550	2	2,80
LCC600H200	595	370560	2	3,04

Connected products:


 KZC...H200
Cable Tray

 KZLC...H200
Cable Tray with
Integral
Connector

 LZCH200
Straight
Connector

 LZGCH200
Articulated
Connector

 KKZC...H200 90°
Horizontal Bend

 KKZMC...H200
45° Horizontal
Bend

 TKZC...H200
Horizontal Tee

 CZKZC...H200
Horizontal
Cross-over

 LZCC...H200 90°
Vertical Bend -
External

 LZCMC...H200
45° Vertical
Bend - External

 LZWC...H200
90° Vertical
Bend - Internal

 LZWMC...H200
45° Vertical
Bend - Internal

 TRZC...H200
Vertical Tee -
Lengthwise

 RKZC...H200
Straight
Reducer