

KKZMC...H200 45° Horizontal Bend

Overview:

APPLICATION

Diversion in cable routing

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray lengths use Straight Connectors LZC...

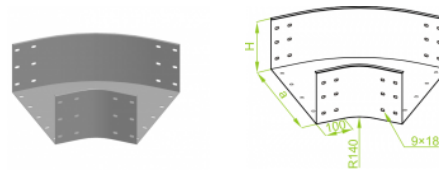

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKZMC200H200	200	370920	4	3,16
KKZMC300H200	300	370930	4	5,01
KKZMC400H200	400	370940	2	6,87
KKZMC500H200	500	370950	2	8,51
KKZMC600H200	600	370960	2	10,36

Connected products:



KZC...H200
Cable Tray



KZLC...H200
Cable Tray with
Integral
Connector



LZCH200
Straight
Connector



LCC...H200
U-Shaped
Connector



LZGCH200
Articulated
Connector



KKZC...H200 90°
Horizontal Bend



TKZC...H200
Horizontal Tee




CZKZC...H200
Horizontal
Cross-over




LZZC...H200 90°
Vertical Bend -
External



LZZMC...H200 45°
Vertical Bend -
External



LZWC...H200 90°
Vertical Bend -
Internal



LZWMC...H200 45°
Vertical Bend -
Internal



TRZC...H200
Vertical Tee -
Lengthwise



RKZC...H200
Straight
Reducer