

LKJH30 Angle Connector

Overview:

Application

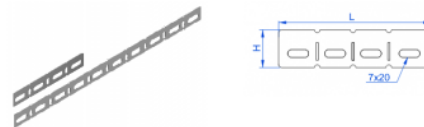
Connecting cable routes.

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

Use 2 Screw Sets SGK M6×10 or SG M6×10 to install
Optional bending or break-off of any required length

Versions:

 Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
LKJH30	140	132200	100	27	0,02
LKJH30/1	1000	132300	100	27	0,15

Connected products:

