

LDZC...H45N 90° Horizontal Bend - External

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order
 Cable Ladder DK - rung cross-section
 Cable Ladder DU - rung cross-section

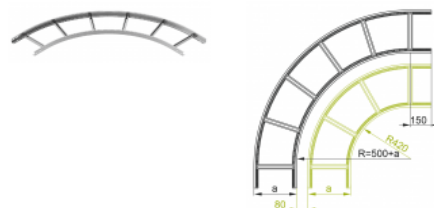

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDZC100H45N	100	447110	2	3,89
LDZC200H45N	200	447120	2	5,22
LDZC300H45N	300	447130	2	6,60
LDZC400H45N	400	447140	2	7,94
LDZC500H45N	500	447150	2	9,21
LDZC600H45N	600	447160	2	10,74