

RDSC...H45N Straight Reducer

Overview:

Application

Reducing/extending widths of cable runs

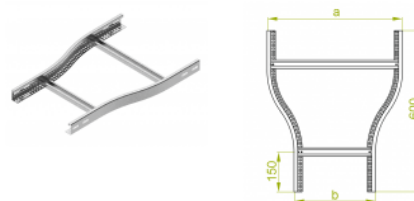
Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

In case of special orders specify dimensions a, b
NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK -rung cross-section Cable Ladder DU - rung cross-section


Versions:

 Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Size b [mm]
RDSC200/100H45N	200	448020	2	1,77	100
RDSC300/200H45N	300	448030	2	2,01	200
RDSC400/300H45N	400	447940	2	2,24	300
RDSC500/400H45N	500	447950	2	2,48	400
RDSC600/500H45N	600	447960	2	2,70	500