

## LDC...H50N 90° Horizontal Bend

### Overview:

#### Application

Diversion in cable routing

#### Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

**NOTE:** The type of fitting rung corresponds to the type of cable ladder in the same order  
**Cable Ladder DK -rung cross-section**  
**Cable Ladder DU - rung cross-section**

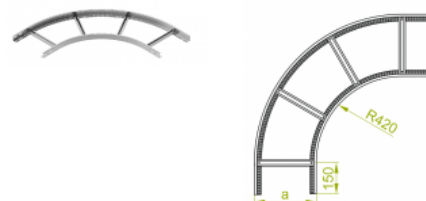

### Versions:

Sheet thickness: **2,0 mm**

| Symbol            | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------------|--------------|------------------|-----------------|--------------|
| <b>LDC100H50N</b> | <b>100</b>   | <b>456910</b>    | <b>2</b>        | <b>3,56</b>  |
| <b>LDC200H50N</b> | <b>200</b>   | <b>456920</b>    | <b>2</b>        | <b>4,29</b>  |
| <b>LDC300H50N</b> | <b>300</b>   | <b>456930</b>    | <b>2</b>        | <b>5,02</b>  |
| <b>LDC400H50N</b> | <b>400</b>   | <b>456940</b>    | <b>2</b>        | <b>5,75</b>  |
| <b>LDC500H50N</b> | <b>500</b>   | <b>456950</b>    | <b>2</b>        | <b>6,49</b>  |
| <b>LDC600H50N</b> | <b>600</b>   | <b>456960</b>    | <b>2</b>        | <b>7,22</b>  |