

RDSP...H60N Straight Reducer

Overview:

Application

Reducing/extending widths of cable runs

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:


F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

In case of special orders specify dimensions **a, b**

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK -rung cross-section Cable Ladder DU - rung cross-section

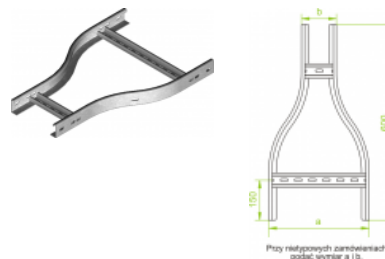

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Size b [mm]
RDSP200/100H60	200	467820	2	1,56	100
RDSP300/200H60	300	467830	2	1,73	200
RDSP400/300H60	400	467840	2	1,91	300
RDSP500/400H60	500	467850	2	2,09	400
RDSP600/500H60	600	467860	2	2,25	500