

RDPC...H60N Right Reducer

Overview:

Application

Reducing/extending widths of cable runs

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

In case of special orders specify dimensions a, b
NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK -rung cross-section Cable Ladder DU - rung cross-section

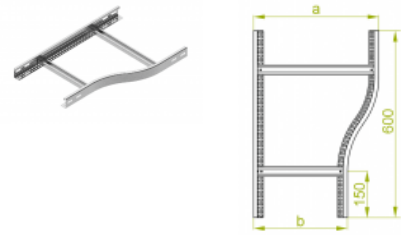

Versions:

 Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Size b [mm]
RDPC200/100H60N	200	468820	2	2,08	100
RDPC300/200H60N	300	468830	2	2,30	200
RDPC400/300H60N	400	468340	2	2,55	300
RDPC500/400H60N	500	468350	2	2,78	400
RDPC600/500H60N	600	468360	2	3,01	500