

RDSC...H80N Straight Reducer

Overview:

Application

Reducing/extending widths of cable runs

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:


F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

In case of special orders specify dimensions a, b

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK -rung cross-section Cable Ladder DU - rung cross-section

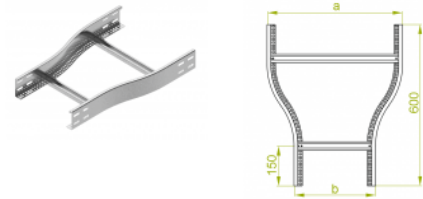

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Size b [mm]
RDSC200/100H80N	200	497420	2	2,44	100
RDSC300/200H80N	300	497430	2	2,65	200
RDSC400/300H80N	400	497440	2	2,89	300
RDSC500/400H80N	500	497450	2	3,13	400
RDSC600/500H80N	600	497460	2	3,34	500