

LPDWP...H80N 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order Cable Ladder DK - rung cross-section Cable Ladder DU - rung cross-section
FEATURES & BENEFITS

- capability of manufacturing vertical bends of any internal radius adjusted to minimum bending angle
- high mechanical properties
- even distribution of cables
- alternative use of covers
- eye-pleasing appearance

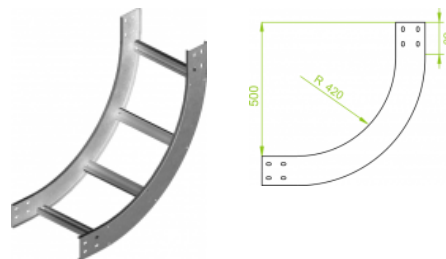

Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDWP200H80N	200	489220	1	2,76
LPDWP400H80N	400	489240	1	3,52
LPDWP500H80N	500	489250	1	3,92
LPDWP600H80N	600	489260	1	4,32