

BDP...N Ladder Side

Overview:

Application

Used in DIY install of cable ladders together with the rungs; at limited-access locations.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

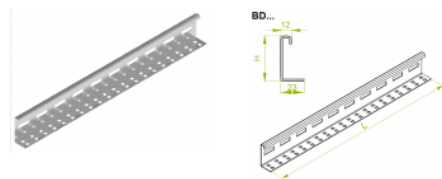

IMPORTANT! Cut-to-length service available upon 2m long sections of cable ladder side walls.

Versions:

Sheet thickness: **1,5 mm**

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight [1m]
BDPH45/3N	3000	440501	1	45	0,81
BDPH45/6N	6000	440601	1	45	0,81
BDPH50/3N	3000	450501	1	50	0,86
BDPH50/6N	6000	450601	1	50	0,86
BDPH60/3N	3000	460501	1	60	0,98
BDPH60/6N	6000	460601	1	60	0,98
BDPH80/3N	3000	480501	1	80	1,19
BDPH80/6N	6000	480601	1	80	1,19
BDPH100/3N	3000	410501	1	100	1,40
BDPH100/6N	6000	410601	1	100	1,40
BDPH120/3N	3000	430401	1	120	1,61
BDPH120/6N	6000	430501	1	120	1,61