

LUJ...H42 90° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

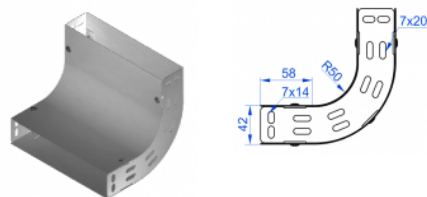

For installation use Screw Sets SGK M6×10 or SG M6×10 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUJ50H42	50	146505	2	0,52
LUJ100H42	100	146510	2	0,80
LUJ150H42	150	146515	2	1,10
LUJ200H42	200	146520	2	1,36
LUJ300H42	300	146530	2	1,92
LUJ400H42	400	146540	2	2,20
LUJ500H42	500	146550	2	2,64
LUJ600H42	600	146560	2	3,03

Connected products:



KAJ...H42 Cable Tray KGL...H42 Cable Tray KGJ...H42 Cable Tray KGR...H42 Cable Tray KCJ...H42 Cable Tray KCL...H42 Cable Tray KOL...H42 Cable Tray KOJ...H42 Cable Tray



KBR...H42 Cable Tray KBL...H42 Cable Tray KBJ...H42 Cable Tray SG... Screw Set SM... Screw Set