

WWC... Bracket

Overview:

APPLICATION

APPLICATION
Supporting cable trays and ladders, pipes, and other systems' components under very heavy load


Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

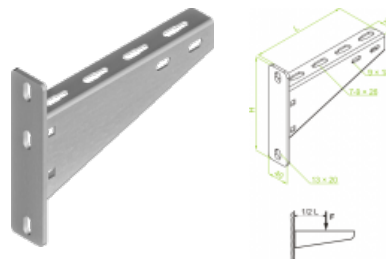

IMPORTANT! Non-standard lengths of brackets available to special order

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WWC200	215	711220	30	175	0,59	4,00
WWC300	315	711230	20	175	0,80	4,00
WWC400	415	711240	20	190	1,17	3,50
WWC500	515	711250	10	190	1,42	3,50
WWC600	615	711260	10	190	1,81	3,50
WWC700	715	711270	4	190	2,09	3,00
WWC800	815	711280	4	255	3,23	3,00
WWC900	915	711290	4	255	3,88	3,00
WWC1000	1015	711211	4	255	4,25	2,50