

WZS... Bracket

Overview:

Application

Supporting cable trays and ladders, pipes, and other systems' components

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

IMPORTANT! Non-standard lengths of brackets available to special order

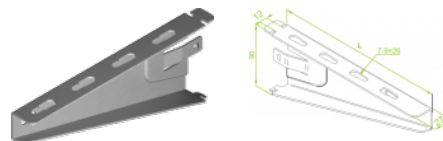

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]
WZS100	110	710210	50	0,16	1,30
WZS150	160	710215	50	0,21	1,20
WZS200	210	710220	30	0,29	1,00
WZS300	310	710230	30	0,63	0,85
WZS400	410	710240	30	0,78	0,80
WZS500	510	710250	20	0,87	0,75
WZS600	610	710260	20	1,02	0,70