


WFC/WFCO... Bracket

Overview:

Application
Suspending cable runs

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

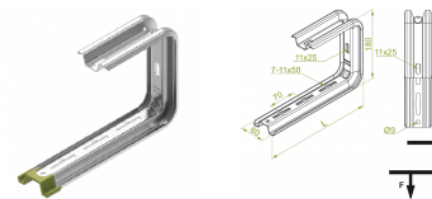

In installation the application of Spacer PD11 is recommended

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]
WFC/WFCO100	174	720310	20	0,47	0,85
WFC/WFCO150	224	720315	20	0,53	0,70
WFC/WFCO200	274	720320	20	0,60	0,50
WFC/WFCO300	374	720330	20	0,73	0,30
WFC/WFCO400	474	720340	20	0,86	0,23
WFC500	574	720350	20	0,99	0,14
WFC600	674	720360	20	1,12	0,10