


WU/WUO... Variable Bracket

Overview:

- Application**
 Supporting cable trays and ladders, pipes, and other systems' components
- Material**
 Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)
- Available to order:**
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

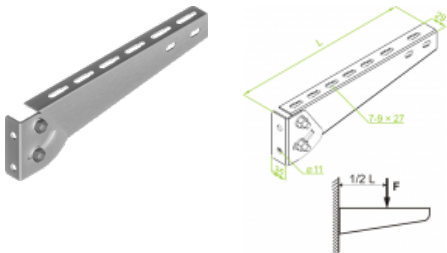

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]
WU/WUO100	145	805210	50	0,22	1,00
WU/WUO200	245	805220	50	0,34	0,85
WU/WUO300	345	805230	30	0,45	0,70
WU/WUO400	445	805240	20	0,64	0,55
WU500	545	805250	20	0,79	0,45
WU600	645	805260	20	0,94	0,30