

WMCN... Bracket

Overview:

APPLICATION

APPLICATION
Supporting cable trays and ladders, pipes, and other systems' components under very heavy load


Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

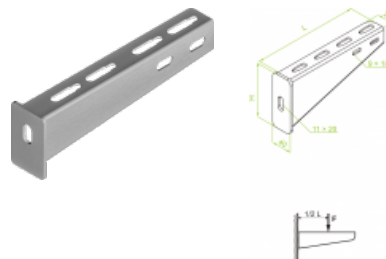

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load F _{max} [kN]
WMCN100	115	712010	50	65	0,17	1,50
WMCN150	165	712015	50	65	0,20	1,40
WMCN200	215	712020	30	65	0,24	1,40
WMCN300	315	712030	30	75	0,40	1,40
WMCN400	415	712040	20	75	0,60	1,30
WMCN500	515	712050	20	90	0,86	1,30
WMCN600	615	712060	20	90	1,00	1,30