


PGM... Threaded Rod

Overview:

Application
Suspending cable runs

Material
Electro-galv. steel (EG)

Available to order:
E- stainless steel (SS) in grades A2 /A4

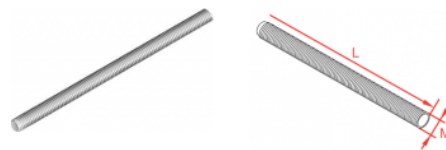

STEEL GRADE 5.8

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Thread M [mm]
PGM6/1	1000	650301	50	0,16	6
PGM8/1	1000	650801	25	0,49	8
PGM8/2	2000	650901	25	1,00	8
PGM8/3	3000	651501	25	1,50	8
PGM10/1	1000	651001	25	0,49	10
PGM10/1E	1000	652101	25	0,49	10
PGM10/2	2000	651101	25	1,00	10
PGM10/3	3000	651601	25	1,50	10
PGM12/1	1000	651201	25	0,72	12
PGM12/2	2000	651301	20	1,44	12
PGM12/3	3000	651701	10	2,16	12

Connected products:

