


SPI... Power Post

Overview:

- Application**
 Indoor cable routing for power, voice, and data services
- Material**
 Electro-galvanised steel (EGS) to PN-EN 10152 Paint-finished – white to RAL9010 or grey to RAL 7035
- Available to order:**
 L – powder coating in a full range of colours (PC)
- Height adjustment allows for installation to the ceiling**

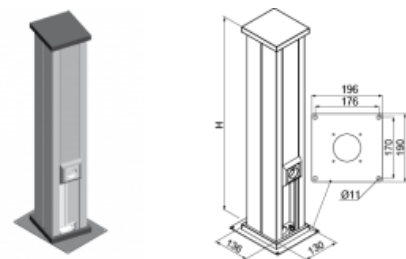

Versions:

Sheet thickness: **1,0 mm**

Symbol	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
SPI 250	911011	6	250	3,15
SPI 500	911013	4	500	5,15
SPI 700	911015	4	700	6,50

Connected products:

- 
 ODA Adjustable Spacer
- 
 ODB Adjustable Spacer
- 
 ODC Adjustable Spacer
- 
 OPTIMA AC Power Switch Unit
- 
 OPTIMA Switch Button Units and Face Plates
- 
 OPTIMA Cover Plates
- 
 OPTIMA Socket Outlet Modules
- 
 OPTIMA TV/FM Aerial Socket Modules
- 
 OPTIMA Reg. Jack Type 12 Telephone Socket/Jack Module
- 
 OPTIMA Voice/Data Outlet Modules
- 
 OPTIMA Mounting Set
- 
 OPTIMA DATA Outlets/Jack Modules
- 
 SI... Power Post
- 
 P1KN71x71 1 Gang Surface Box
- 
 P2KN71x142 2 Gang Surface Box