

WWSS... Bracket

Overview:

Application

Suspending wire mesh cable trays.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

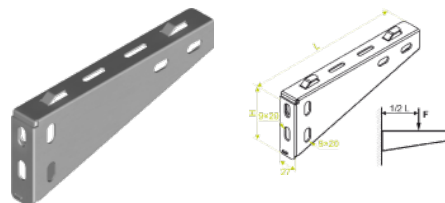

Important!

Bracket WWSS may be used in combination with Clamping Piece ZS/ZSO

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load F _{max} [kN]
WWSS 100	115	900710	30	80	0,19	1,20
WWSS 200	215	900720	30	90	0,38	1,40
WWSS 300	315	900730	30	115	0,77	1,90
WWSS 400	415	900740	20	115	1,20	1,80
WWSS 500	515	900750	20	115	1,22	1,60
WWSS 600	615	900760	20	115	1,33	1,50

Connected products:

