

USSW Splice Washer Kit

Overview:


Application

Joining system components of Wire Mesh Cable Trays. For cable tray side heights H30, H60, H110.

At side height H30:
for width 100mm use 3xUSS N
for widths 200mm and 300mm use 4xUSS N.

At height H60:
for width 60 use 2xUSS N
for width 100 use 3xUSS N
for widths: 200 - 400 use 4xUSS N
for widths: 500 - 600mm use
2 X USSW + 3xUSS N.

At height H110:
for widths: 200 - 400mm use:
2 x USSW + 2xUSS N
for widths: 500 - 600mm use:
2 x USSW + 3xUSS N

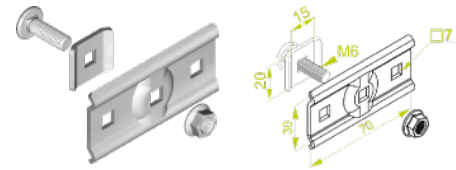

Joining system components of Wire Mesh

Cable Trays. For cable tray side heights H30, H60, H110.

At side height H30:

for width 100mm use 3xUSS N

for widths 200mm and 300mm use 4xUSS N.

At height H60:

for width 60 use 2xUSS N

for width 100 use 3xUSS N

for widths: 200 - 400 use 4xUSS N

for widths: 500 - 600mm use

2 X USSW + 3xUSS N.

At height H110:

for widths: 200 - 400mm use:

2 x USSW + 2xUSS N

for widths: 500 - 600mm use:

2 x USSW + 3xUSS N



Connected products:





UUS Grounding
Clamp



PMC/PMCO...
Snap-in Support



WSD... Ceiling
Bracket