

LPDWC...H120N 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)


E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

NOTE: The type of fitting rung corresponds to the type of cable ladder in the same order
 Cable Ladder DK - rung cross-section
 Cable Ladder DU - rung cross-section

FEATURES & BENEFITS

- capability of manufacturing vertical bends of any internal radius adjusted to minimum bending angle
- high mechanical properties
- even distribution of cables
- alternative use of covers
- eye-pleasing appearance

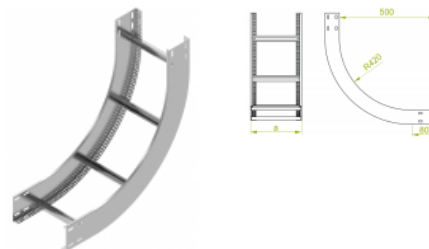

Versions:

Sheet thickness: 2,0 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDWC100H120N	100	484510	1	4,61
LPDWC200H120N	200	484520	1	4,97
LPDWC300H120N	300	484530	1	5,37
LPDWC400H120N	400	484540	1	5,73
LPDWC500H120N	500	484550	1	6,13
LPDWC600H120N	600	484560	1	6,53